


【香川県】

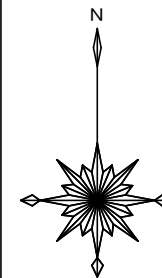

林内作業路① L=240m
控除幅8.0m x 240m=0.19ha

林内作業路② L=150m
控除幅8.0m x 150m=0.60ha

林内作業路③ L=130m
控除幅8.0m x 130m=0.58ha

丸太筋工 L=40.0m

作業歩道 L=600.0m

A地区 外周面積 22.09ha
作業路控除①+② -0.79ha
A地区 21.30ha

B, C地区 外周面積 12.82ha
作業路控除③ -0.58ha
B, C地区 12.24ha

凡 例



施 工 範 囲

標 準 地 番 号

1

区域名	面 積	標準地数
西俣名 A地区	21.30ha	5箇所
西俣名 B地区	8.62ha	3箇所
西俣名 C地区	3.62ha	2箇所
合 計	33.54ha	10箇所

委託業務名	R8馬林 流域保全 美馬市西俣名 森林整備		
路線名等	西俣名 地区		
委託業務箇所	美馬市脇町西俣名		
図面名	平 面 図		
縮尺	1/5,000	図面番号	1/4
会社名			
事業者名	徳島県美馬農林事務所		




面積 22.09 ha (控除前)
誤差 1/353
縮尺 1/5,000


成 果 表					
测 点	方位角	高 度 角	斜 距	水平距	垂直距
B83 - B84	171.0	-1.0	11.76	11.76	0.00
B84 - B85	150.0	-5.5	25.74	25.62	4.50
B85 - B86	156.5	-9.5	15.11	14.90	2.60
B86 - B87	140.0	-11.0	8.58	8.42	1.43
B87 - B88	115.0	-6.5	14.93	14.83	0.83
B88 - B89	142.0	-5.0	10.74	10.70	0.74
B89 - B90	125.5	-8.0	7.11	7.04	1.20
B90 - B91	90.5	-4.5	9.88	9.85	0.55
B91 - B92	98.0	-10.0	17.97	17.70	3.67
B92 - B93	106.0	-10.5	4.75	4.67	0.70
B93 - B94	119.5	-9.0	8.85	8.74	1.45
B94 - B95	104.0	-8.5	8.55	8.46	0.85
B95 - B96	92.0	-8.5	14.34	14.18	2.52
B96 - B97	90.0	-7.5	10.61	10.52	1.08
B97 - B98	59.0	-5.0	27.97	27.86	0.86
B98 - B99	71.5	-8.0	18.70	18.52	2.52
B99 - B100	101.0	-5.0	13.26	13.21	0.71
B100 - B101	54.0	-9.0	22.85	22.57	3.59
B101 - B102	57.0	-2.5	15.40	15.39	0.15
B102 - B103	152.0	-2.0	18.12	18.11	0.11
B103 - C50	154.5	-5.5	15.58	15.51	0.51
C50 - C51	156.0	-5.5	19.93	19.84	0.84
C51 - C52	144.0	-5.0	27.77	27.66	1.66
C52 - C53	163.0	-7.0	17.15	17.02	0.72
C53 - C54	72.0	20.5	16.57	15.52	5.52
C54 - C55	75.0	22.5	8.90	8.22	0.82
C55 - C56	116.0	6.0	10.59	10.53	0.53
C56 - C57	84.0	25.0	16.95	15.36	1.56
C57 - C58	81.0	33.0	21.99	18.44	3.44
C58 - C59	85.0	36.5	18.60	14.95	3.65
C59 - C60	82.0	40.0	11.66	8.93	2.93
C60 - C61	23.0	20.0	16.18	15.20	0.98
C61 - C62	42.0	17.0	17.85	17.07	0.77
C62 - C63	14.0	12.0	19.55	19.12	0.72
C63 - C64	35.0	7.5	16.62	16.48	0.48
C64 - C65	359.0	18.0	8.85	8.42	0.42
C65 - A69	11.0	17.0	17.16	16.41	0.75
A69 - A68	314.0	16.0	18.65	17.93	0.73
A68 - A67	318.0	12.0	23.24	22.73	0.73
A67 - A66	320.0	9.0	22.70	22.42	0.42
A66 - A65	347.0	8.0	21.69	21.28	0.87
A65 - A64	347.0	11.0	19.32	18.97	0.97
A64 - A63	342.0	11.0	17.72	17.39	0.99
A63 - A62	335.0	5.0	17.91	17.84	0.04
A62 - A61	335.5	5.0	16.39	16.33	0.03
A61 - A60	337.0	10.0	18.83	18.54	0.54
A60 - A59	338.0	11.0	20.50	20.12	0.22
A59 - A58	334.0	14.0	21.52	20.88	0.88
A58 - A57	325.0	1.0	19.89	19.89	0.00
A57 - A56	323.0	9.0	20.14	19.89	0.89
A56 - A55	285.0	9.0	10.26	10.13	0.13
A55 - A54	303.0	19.0	16.30	15.41	0.91
A54 - A53	316.0	11.0	21.94	21.54	0.54
A53 - A52	315.0	5.0	26.72	26.62	0.22
A52 - A51	318.0	11.0	23.02	22.96	0.06
A51 - A50	318.5	12.0	21.43	20.60	0.60
A50 - A49	317.0	16.0	17.51	16.83	0.83
A49 - A48	320.0	21.0	17.33	16.18	1.18
A48 - A47	322.0	16.0	15.82	15.21	0.61
A47 - A46	334.0	16.0	15.65	15.04	0.64
A46 - A45	336.0	17.0	19.83	18.96	0.96
A45 - A44	293.0	10.0	17.43	17.17	0.27
A44 - A43	290.0	7.0	18.31	18.17	0.17
A43 - A42	289.5	5.0	16.95	16.89	0.09
A42 - A41	291.0	3.0	17.98	17.96	0.

成 果 表					
測 点	方 位 角	高 低 角	斜 距	水平距離	水平距離
A25 - A24	315.0	14.0	16.22	15.74	15.74
A24 - A23	261.0	-5.0	20.30	20.26	20.26
A23 - A22	280.0	5.0	22.74	22.61	22.61
A22 - A21	272.0	12.0	12.94	12.66	12.66
A21 - A20	273.0	11.0	15.68	15.33	15.33
A20 - A19	271.0	12.0	21.02	20.50	20.50
A19 - A18	263.5	15.0	19.71	19.19	19.19
A18 - A17	277.0	17.0	14.90	14.24	14.24
A17 - A16	276.0	20.0	15.33	14.41	14.41
A16 - A15	279.0	18.0	15.23	14.47	14.47
A15 - A14	308.0	18.0	18.44	17.29	17.29
A14 - A13	309.5	16.0	11.73	11.54	11.54
A13 - A12	241.0	2.0	24.12	24.11	24.11
A12 - A11	229.0	-7.0	22.42	22.25	22.25
A11 - A10	233.0	-11.0	19.46	19.10	19.10
A10 - A9	252.5	4.0	13.14	13.11	13.11
A9 - A8	225.0	-5.0	8.16	8.13	8.13
A8 - A7	163.0	-35.0	14.68	12.03	12.03
A7 - A6	235.0	2.0	7.95	7.95	7.95
A6 - A5	197.0	-12.0	8.44	8.20	8.20
A5 - A4	132.5	-17.0	21.14	20.24	20.24
A4 - A3	99.5	-7.0	18.66	18.52	18.52
A3 - A2	171.0	-18.0	24.75	23.54	23.54
A2 - A1	243.0	-9.0	14.25	14.07	14.07
A1 - E - P	141.0	-20.0	12.48	11.73	11.73
合 計			3,028.11	2,911.73	2,911.73

委託業務名	R8馬林 流域保全 美馬市西俣名 森林整備		
路線名等	西俣名地区		
委託業務箇所	美馬市脇町西俣名		
図面名	測量実測図(A地区)		
縮尺	1/5,000	図面番号	2/4
会社名			
事業者名	徳島県美馬市農林事務所		

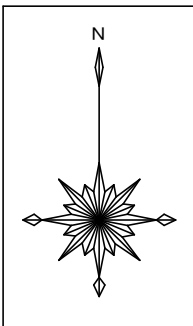

測量実測図 S=1/5,000

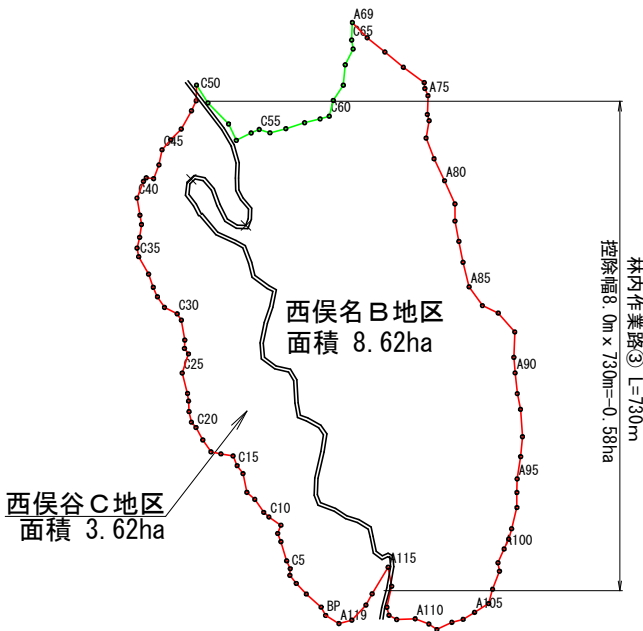

B, C地区 外周面積 12.82ha
作業路控除③ -0.58ha
B・C地区 12.24ha

面積 12.82 ha(控除前)
誤差 1/168
縮尺 1/5,000

成果表					
測点	方位角	高低角	斜距離	水平距離	
BP - C1	340.0	12.0	8.96	8.76	
C1 - C2	320.0	10.5	18.70	18.39	
C2 - C3	325.0	18.5	14.35	13.61	
C3 - C4	330.0	12.0	9.79	9.58	
C4 - C5	12.0	35.5	7.64	6.22	
C5 - C6	344.0	15.0	8.39	8.10	
C6 - C7	352.0	6.0	18.75	18.65	
C7 - C8	347.0	6.0	8.17	8.13	
C8 - C9	30.0	29.5	9.55	8.31	
C9 - C10	313.0	-10.0	13.76	13.55	
C10 - C11	320.0	-23.5	6.99	6.41	
C11 - C12	334.0	4.0	14.70	14.66	
C12 - C13	320.0	4.5	9.87	9.84	
C13 - C14	357.0	26.0	19.88	17.87	
C14 - C15	332.0	5.0	9.23	9.19	
C15 - C16	346.0	4.0	9.81	9.79	
C16 - C17	288.0	-16.0	11.96	11.50	
C17 - C18	290.0	-11.0	9.63	9.45	
C18 - C19	334.0	13.0	13.71	13.36	
C19 - C20	340.0	11.0	13.43	13.18	
C20 - C21	328.0	0.0	6.56	6.56	
C21 - C22	356.0	5.5	10.15	10.10	
C22 - C23	6.0	28.5	11.23	9.87	
C23 - C24	1.0	4.5	7.15	7.13	
C24 - C25	354.0	8.0	19.86	19.67	
C25 - C26	27.0	10.0	19.06	18.77	
C26 - C27	332.0	13.5	6.50	6.32	
C27 - C28	11.0	15.0	8.08	7.80	
C28 - C29	359.0	3.0	18.90	18.87	
C29 - C30	335.0	1.5	7.08	7.08	
C30 - C31	305.0	-10.5	13.41	13.19	
C31 - C32	335.0	19.0	12.57	11.89	
C32 - C33	345.0	23.0	10.51	9.67	
C33 - C34	349.0	22.0	14.00	12.98	
C34 - C35	339.0	2.0	18.69	18.68	
C35 - C36	358.0	10.5	8.26	8.12	
C36 - C37	22.0	22.5	11.19	10.34	
C37 - C38	17.0	36.5	15.05	12.10	
C38 - C39	359.0	15.5	9.12	8.79	
C39 - C40	359.0	-3.5	16.23	16.20	
C40 - C41	30.0	20.0	17.92	16.84	
C41 - C42	47.0	27.0	4.66	4.15	
C42 - C43	105.0	43.0	9.53	6.97	
C43 - C44	30.0	17.5	14.42	12.75	
C44 - C45	20.0	13.0	14.82	14.44	
C45 - C46	50.0	34.5	15.08	12.43	
C46 - C47	53.0	32.5	16.70	14.08	
C47 - C48	38.0	12.0	19.99	19.55	
C48 - C49	34.0	22.0	11.11	10.30	
C49 - C50	10.0	19.0	15.62	14.77	
C50 - C51	156.0	-5.5	19.93	19.84	
C51 - C52	144.0	-5.0	27.77	27.66	
C52 - C53	163.0	-7.0	17.15	17.02	
C53 - C54	72.0	20.5	16.57	15.52	
C54 - C55	75.0	22.5	8.90	8.22	
C55 - C56	116.0	6.0	10.59	10.53	
C56 - C57	84.0	25.0	16.95	15.36	
C57 - C58	81.0	33.0	21.99	18.44	
C58 - C59	85.0	36.5	18.60	14.95	
C59 - C60	82.0	40.0	11.66	8.93	
C60 - C61	23.0	20.0	16.18	15.20	
C61 - C62	42.0	17.0	17.85	17.07	
C62 - C63	14.0	12.0	19.55	19.12	
C63 - C64	35.0	47.5	16.62	16.46	
C64 - C65	359.0	18.0	8.85	8.42	
C65 - A69	11.0	17.0	17.16	16.41	
A69 - A70	144.0	-18.0	21.04	20.01	
A70 - A71	137.0	-10.0	21.68	21.35	
A71 - A72	138.0	-7.0	22.73	22.56	
A72 - A73	134.5	-7.0	24.56	24.38	
A73 - A74	182.0	-15.0	5.81	5.61	
A74 - A75	164.5	-21.0	7.81	7.29	
A75 - A76	190.0	-23.0	19.14	17.62	
A76 - A77	172.0	-35.0	7.48	6.13	
A77 - A78	198.0	-36.0	20.42	16.52	
A78 - A79	167.0	-9.0	21.11	20.85	
A79 - A80	162.5	-9.0	23.15	22.86	
A80 - A81	164.0	-9.0	24.22	23.92	
A81 - A82	188.0	-11.0	16.34	16.04	
A82 - A83	177.0	-5.0	19.50	19.43	
A83 - A84	177.0	-8.0	20.20	20.00	

成果表					
測点	方位角	高低角	斜距離	水平距離	
A84 - A85	174.0	-14.0	24.43	23.70	
A85 - A86	153.0	-21.0	23.18	21.64	
A86 - A87	123.5	-15.0	17.04	16.46	
A87 - A88	147.0	-18.0	24.80	23.59	
A88 - A89	190.0	-20.0	25.39	23.86	
A89 - A90	183.5	-9.0	14.80	14.62	
A90 - A91	182.0	-13.0	20.10	19.58	
A91 - A92	176.5	-10.0	15.28	15.05	
A92 - A93	184.0	-12.0	26.36	25.78	
A93 - A94	193.0	-12.0	19.14	18.72	
A94 - A95	197.0	-7.0	21.24	21.08	
A95 - A96	189.0	-15.0	13.17	12.72	
A96 - A97	188.0	-26.0	15.75	14.16	
A97 - A98	202.0	-17.0	21.40	20.46	
A98 - A99	204.0	-25.0	11.03	10.00	
A99 - A100	212.5	-28.0	11.64	10.28	
A100 - A101	212.0	-18.0	14.83	14.10	
A101 - A102	178.0	-24.0	8.85	8.08	
A102 - A103	209.0	-23.0	19.60	18.04	
A103 - A104	203.5	-22.0	15.07	13.92	
A104 - A105	246.0	2.0	15.47	15.46	
A105 - A106	246.5	-2.0	12.47	12.46	
A106 - A107	263.0	-1.0	10.82	10.82	
A107 - A108	252.5	-6.0	15.61	15.52	
A108 - A109	313.0	13.0	9.30	9.06	
A109 - A110	299.0	4.0	13.65	13.62	
A110 - A111	276.0	-13.0	17.68	17.23	
A111 - A112	307.0	-13.0	8.37	8.16	
A112 - A113	354.0	-10.0	7.81	7.69	
A113 - A114	21.5	10.0	20.41	20.10	
A114 - A115	358.0	8.0	18.24	18.06	
A115 - A116	219.0	-26.0	32.23	28.97	
A116 - A117	217.0	-35.0	14.70	12.04	
A117 - A118	231.0	-37.0	24.12	19.26	
A118 - A119	263.0	-25.0	13.70	12.42	
A119 - E-P	310.0	-11.0	14.78	14.51	
小計			1,774.63	1,684.92	
控除				-249.19	
合計				1,435.73	

委託業務名	R8馬林 流域保全 美馬市西俣名 森林整備		
路線名等	西俣名地区		
委託業務箇所	美馬市脇町西俣名		
図面名	測量実測図 (B, C地区)		
縮尺	1/5,000	図面番号	3/4
会社名			
事業者名	徳島県美馬農林事務所		

丸太筋工 (2本筋)
S=1/20


側面図



10m当り

横木 (L=2.0m φ10cm標準)	10本
杭木 (L=0.6m φ10cm内外)	15本
鉄線 (なまし #14)	1.0kg

正面図

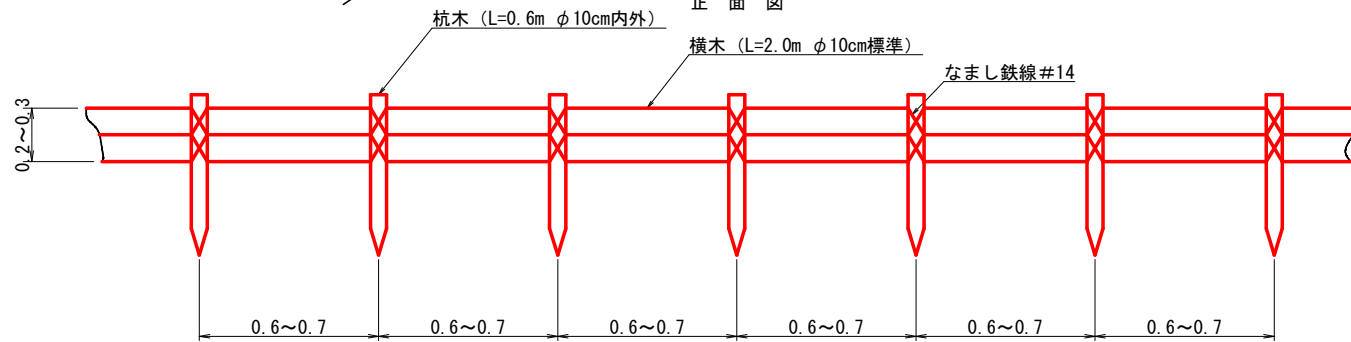


丸太筋工 L=40.0m

作業歩道 標準断面図
S=1/20

作業歩道L=600.0m

幅員 0.50m

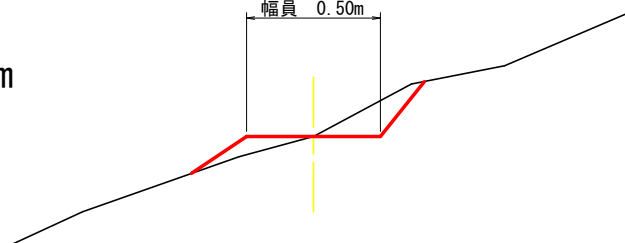

委託業務名	R8馬林 流域保全 美馬市西俣名 森林整備		
路線名等	西俣名地区		
委託業務箇所	美馬市脇町西俣名		
図面名	定規図 筋工 (丸太) ・ 歩道		
縮尺	1/20	図面番号	4/4
会社名			
事業者名	徳島県美馬農林事務所		